


РАЗМЕРЫ ФЛАНЦЕВ




DN	D	M	G	максимальная толщина
32	140	100	78	18
40	150	110	88	18
50	165	125	102	20
65	185	145	122	20

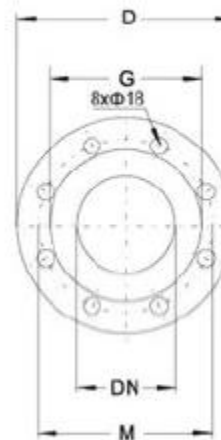

DN	D	M	G	максимальная толщина
80	200	160	138	22
100	220	180	158	24

СХЕМА УСТАНОВКИ

(для насосов с мощностью двигателя выше 7,5 кВт)

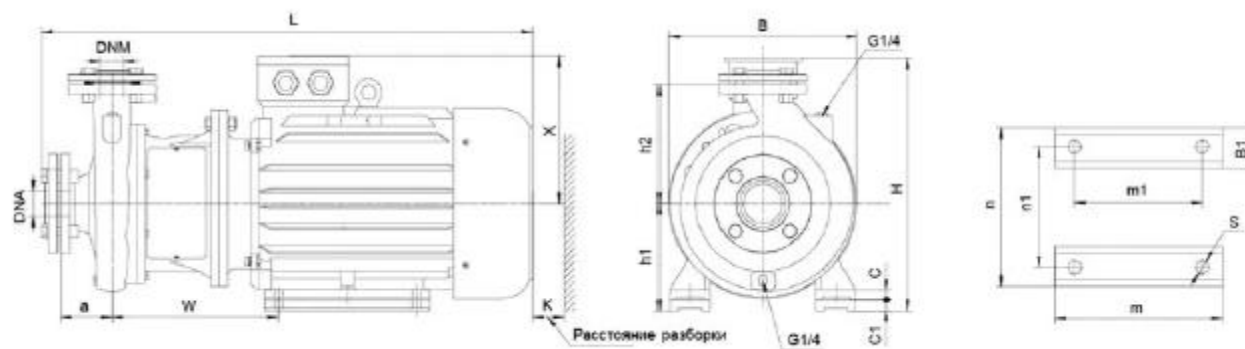

Модель	DNM	DNA	a	h2	w	x	B1	C	C1	h1	m	m1	n	n1	s	B	H	L	K													
XST80-160/110	80	100	125	225	315	255	65	20		160	260	210	314	254	14,5	350	425	869	130													
XST80-160/150											304	254						913														
XST80-160/185																																
XST80-200/220				250	352	250	70	22	-	180	311	241	349	279	18,5	400	505	465	978	120												
XST80-200/300					364	305		25		200	368	305	388	318				18,5	450		560	1104										
XST80-250/370				370	280																		388	335	75	28	225	393	311	431	356	18,5
XST80-250/450				438		370	80	30		30	280	445	349	484	406	24	550	650	1205													
XST80-250/550																																